


# ASSEMBLY AND INSTALLATION INSTRUCTIONS FOR ITEM #178-3/# 179-3 #178-6/# 179-6

## WARNING:

**TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.**

**NOTE:** Should any difficulty be experienced, please consult a qualified electrician before installing.

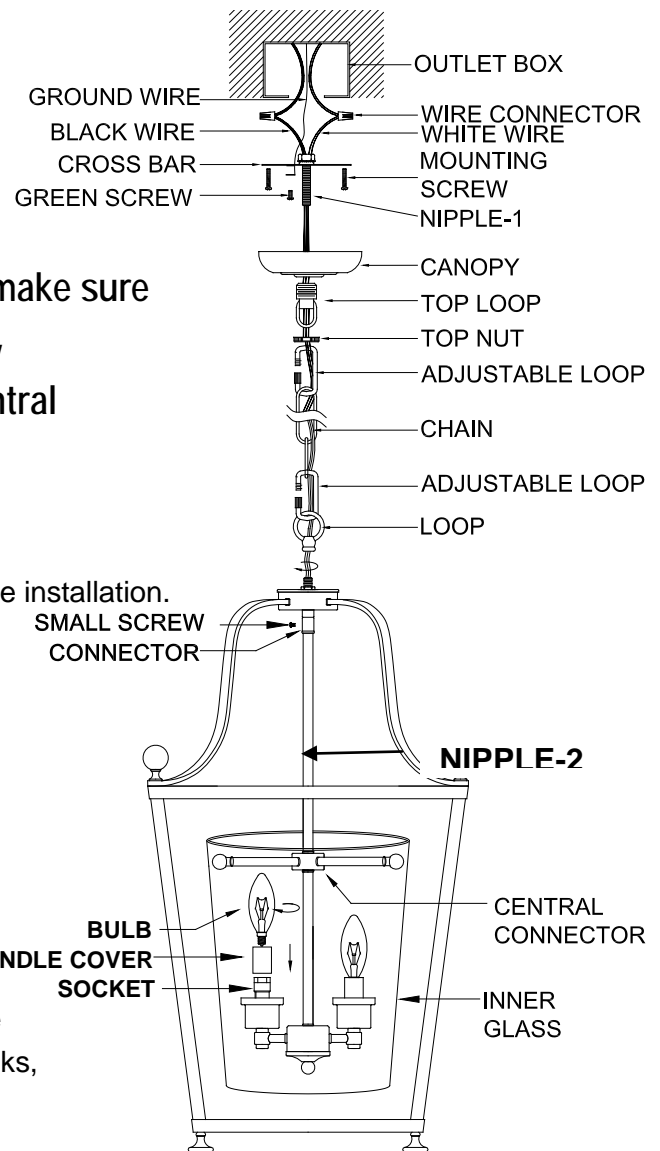

**Warning:** Before installing the fixture, please make sure

You have followed up the Inner Glass Assembly Instructions to install the Inner Glass to the Central Connector.

### Installation steps:

1. Turn off the electricity at the Fuse or Circuit Breaker before installation.
2. Attach the Cross Bar to the Outlet Box by using 2PCS of Mounting Screws upwards.
3. Attached the Loop to the Nipple-2.
4. Put the Candle Cover onto the Sockets and install bulbs.  
**(Bulbs are not included, please do not exceed the maximum capacity which is recommended on the Candle Cover.)**
6. Straight the Central Cluster to be vertical and then fixing the Small Screw to the Connector.
7. Choose a certain length of the Chain you need, and weave the Fixture Wire and the Ground Wire through the Chain links, then attached one of the Adjustable Loops to the Top Loop and the other one to the Loop.
8. Thread the fixture wire and the Ground Wire through the Top Nut, Top Loop, Adjustable Loop, Canopy, Nipple-1 and the Cross Bar in order.
9. Make wire connections with Wire Connectors:
  - Connect the Wire (W/ marking) from the light to the Black Wire from the Outlet Box.
  - Connect the Wire (W/O marking) from the light to the White Wire from the Outlet Box.
  - Attached the Ground Wire and House Ground Wire to the Cross Bar with a Green Screw.

Carefully tuck wires back into the Outlet Box.
10. Attached the Canopy to the Cross Bar by inserting the Nipple-1, then secure with the Top Loop and Top Nut.
11. Turn on the power at Fuse or Circuit Box and enjoy your new fixture.